

Lutron | Roller 64

The Lutron roller 64 shade utilizes the ultra-quiet, precision controlled Electronic Drive Unit. The roller 64 drive unit is housed inside the roller shade assembly and controls the movement of the shade, keeps track of the shade’s position, and adjusts the shade to the user’s desired preset positions.

Features and Specifications

- Provides maximum window coverage with the smallest possible light gaps, 0.75 in (19 mm.) between the shade fabric and the window frame. Light gaps are symmetrical on both sides of shade.
- roller 64 shade chassis is compatible with QED, QS, and Sivoia QS Wireless drive units.
- 8 year limited warranty
- Maximum size of shade fabric per drive is 64 ft.² (6 m²)




Lutron roller 64 shade

Job Name:	Model Numbers:
Job Number:	


Lutron roller 64 shade options

Mounting options

Depending on window dimensions, brackets can be mounted inside the window frame, outside the window frame, or in a headbox.




Inside mount



Outside mount

Fabric drop options

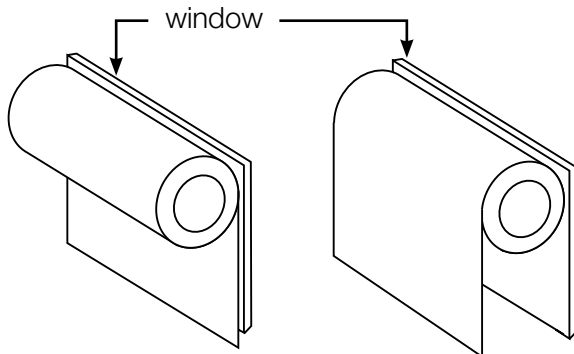

Regular roll

Reverse roll

Fabric Options


Lutron roller 64 roller shades are available in a wide variety of fabric types including:

- Sheer – Filter sunlight, UV protection, view
- Privacy – Minimal translucence, UV protection
- Blackout – Total darkness, maximum UV protection, no view


For complete fabric selection, visit www.lutron.com

Drive side options

Drive can be mounted on the left or right of the shade:




Left drive side




Right drive side

Bottom bar options


The bottom bar comes in three varieties:



Full-wrap
bottom bar



Exposed
bottom bar



Half-wrap
bottom bar
(reverse view
shown)

Exposed available in:

- white
- bronze
- anodised
- custom color


Welded bottom bars also available.

Job Name:


Model Numbers:

Job Number:

Dimensions

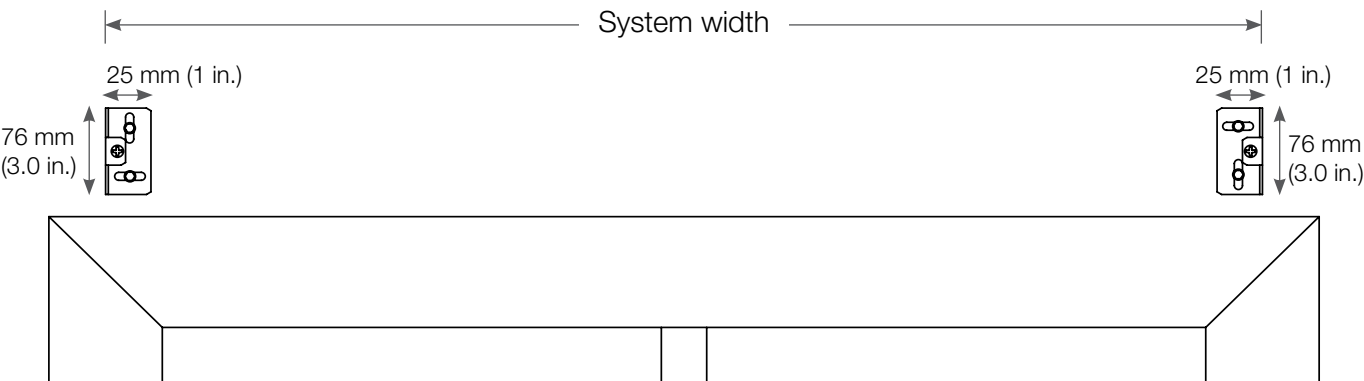

Complete Assembly

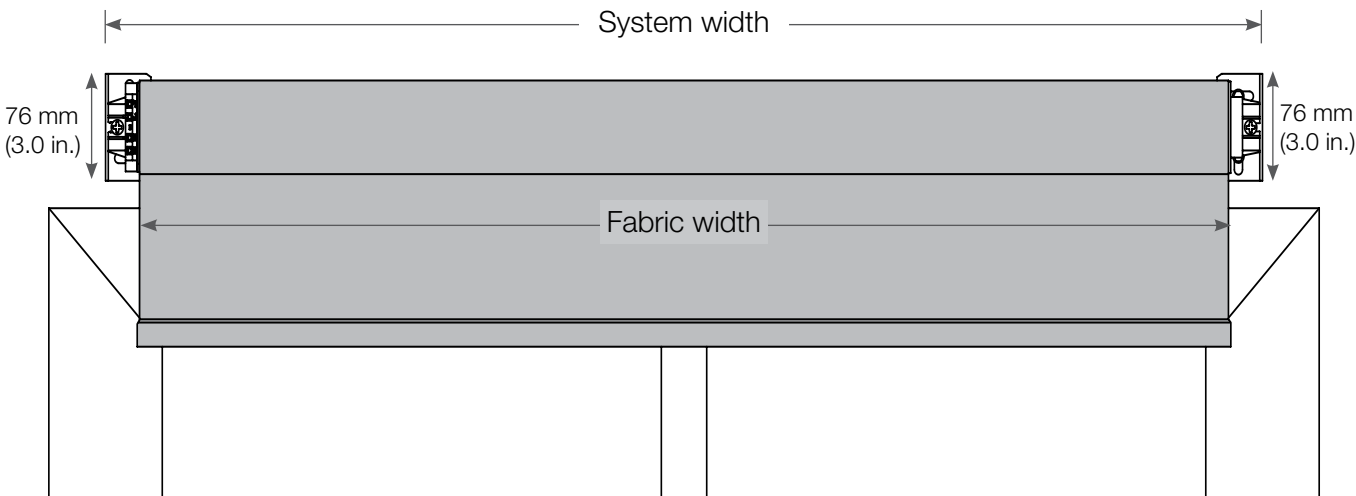


(Wall brackets shown)


Bracket options

The Lutron roller 64 uses 3 distinct bracket designs to accommodate a variety of mounting conditions:


1) Universal Bracket




Wall mount



Ceiling mount




Jamb/recess mount




Endcap in white


2) Fascia Mount Bracket




For use with curved or squared Fascia



Curved Fascia




Fascia endcaps available in white, gray, or bronze plastic

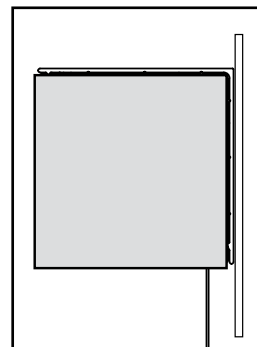

Squared Fascia with endcap

3) Dual Mount Bracket



For installation where 2 roller shades, a sheer shade and blackout shade, for example, are installed in the same window.



Job Name:

Model Numbers:


Job Number:

Fabric drop wall mount or jamb mount

83 mm (3.3 in.) maximum system projection

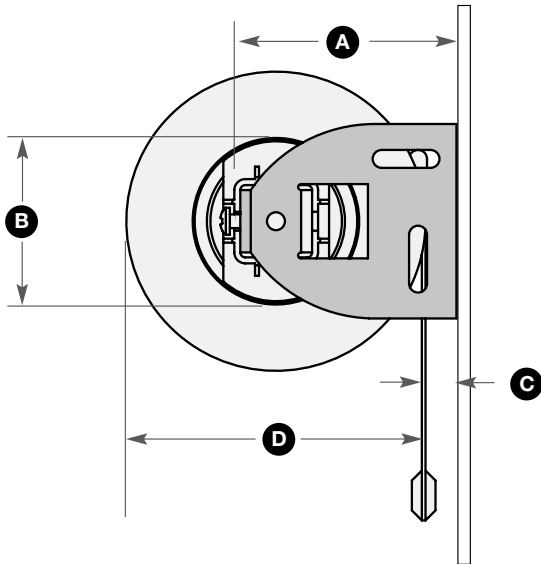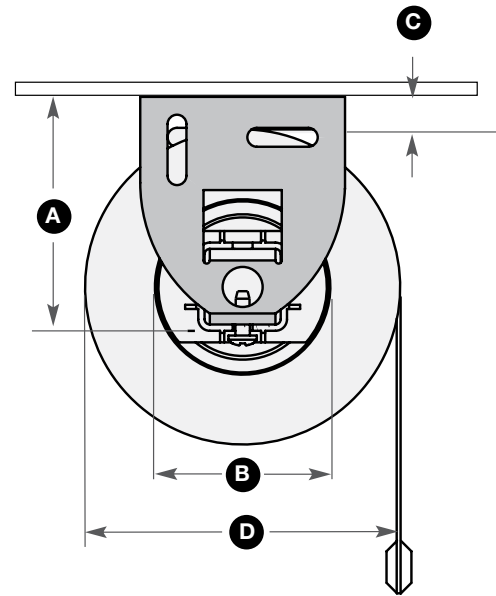**Fabric drop ceiling mount****Dimensions**

- A** 55 mm (2.18 in.)
- B** 41 mm (1.63 in.)
- C** 7 mm (0.3 in.)
- D** 76 mm (3.0 in.)

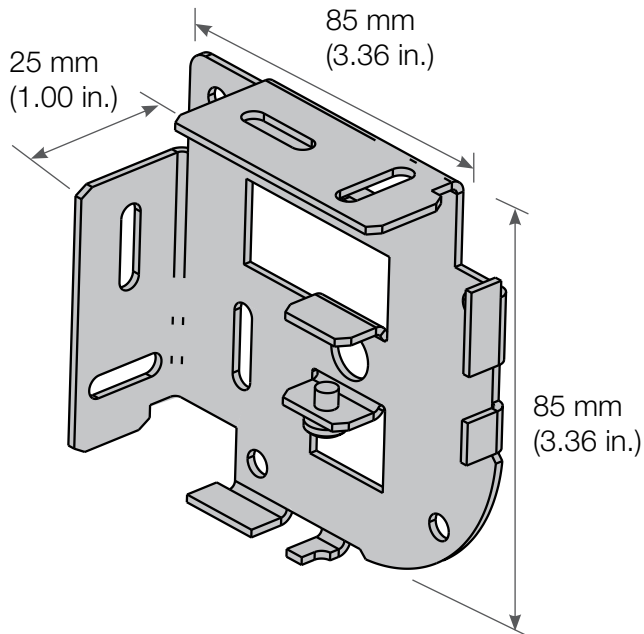
Fascia bracket

Job Name:

Model Numbers:

Job Number:


Headbox installation

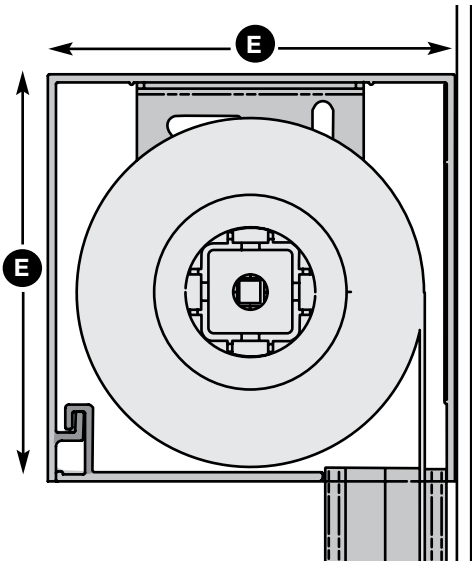

Dimensions

E 89 mm (3.5 in.)

Dual-mount

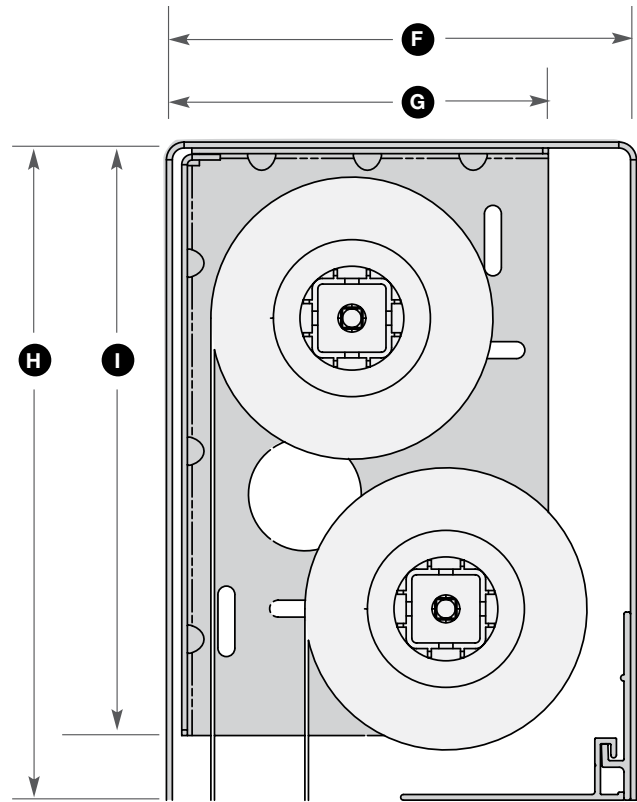

Dimensions

- F** 152 mm (6.0 in.)
- G** 98 mm (3.88 in.)
- H** 178 mm (7.0 in.)
- I** 171 mm (6.75 in.)